




### External Dimension

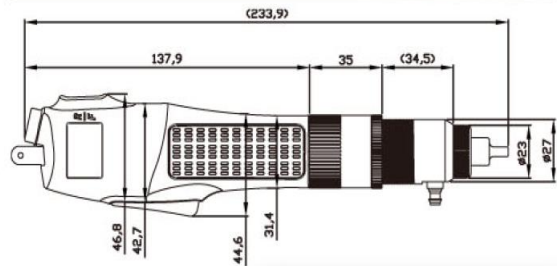

- Vacuum screwdriver was taking the series of SKD-BN200L as reference and being created by adding the vacuum head. The main purpose is sucking the non-magnetic screws, such as plastic screws / aluminum-made screws / stainless steel screws and any other screws that does not contain magnetic.
- Any type and specification of screws can be sucked which only need to replace the head to KS-2B.
- The volume of vacuum screwdriver pump is small; it is suitable to all kinds of vacuum screwdrivers.
- The suction of vacuum pump is powerful; if the screws tray is using together, it will be more convenient and easy. The screws can be placed at the tray first and then sucked by the vacuum screwdriver.

### Specifications

Mode		SKD-BN203L(VACUUM TYPE)	SKD-BN207L(VACUUM TYPE)	SKD-BN210L(VACUUM TYPE)	SKD-BN203LS5(VACUUM TYPE)	SKD-BN203LS6(VACUUM TYPE)	SKD-BN203LS7(VACUUM TYPE)
Input Voltage		DC24V or DC32V					
Torque	(kgf.cm)	0.2~3.5	0.5~7	1~10	0.2~3.5	0.2~3.5	0.2~3.5
	(Lbf.in)	0.18~3.01	0.44~6.10	0.89~8.67	0.18~3.01	0.18~3.01	0.18~3.01
	(N.m)	0.02~0.34	0.05~0.69	0.1~0.98	0.02~0.34	0.02~0.34	0.02~0.34
Repeatable Torque Accuracy(%)		±3%					
Torque Adjustment		Stepless					
Free Speed (r.p.m)	HI	1000	1000	1000	500	370	230
	LO	700	700	700	350	260	160
Screw Size Dia (mm)	Machine Screw	1.0~2.3	1.4~2.6	1.6~3.0	1.0~2.3	1.0~2.3	1.0~2.3
	Tapping Screw	1.0~2.0	1.4~2.3	1.6~2.6	1.0~2.0	1.0~2.0	1.0~2.0
Power Consumption		25W					
Weight(g)		385					
Length(mm)		234					
ESD(Anti-Static)		✓ (with black housing)					
CE		✓					
RoHS		✓					
Power Controller		SKP-32BC-60W					
Bit Type							